

FAVEN

R6

R8

R8 FFA

→ FINANCIALS

ROI in one Harvest.
Reduce Labour Inputs.

→ YIELD


Drive Revenue Targets:
20-30% Yield Increase on
Average.

→ QUALITY

Sell Product Quickly:
Reduce Low Value SKUS.

→ UNIFORMITY

Top Dollar for your
Product:
Uniform in Color, Shape,
and Density.

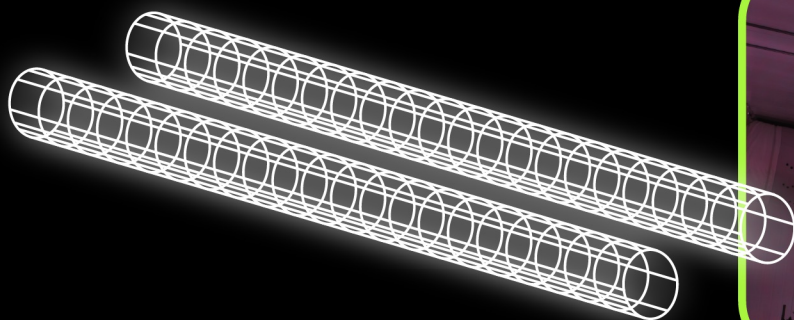


UNDER CANOPY LIGHTING

TECHNICAL SPECIFICATIONS

R6W

GEARED FOR HPS


$\mu\text{mol/s/nm}$

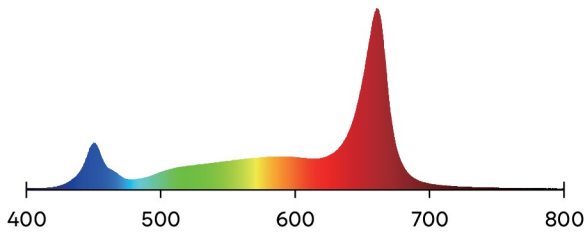

R8W

GEARED FOR LED


$\mu\text{mol/s/nm}$

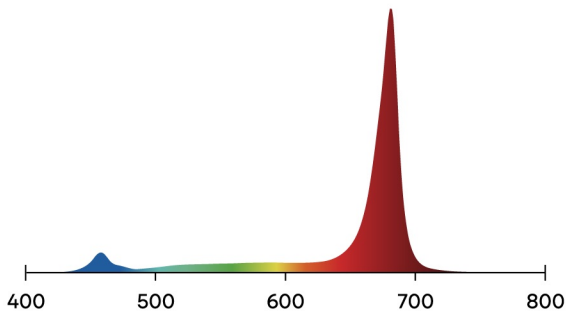

R8FR

GEARED FOR LED

$\mu\text{mol/s/nm}$

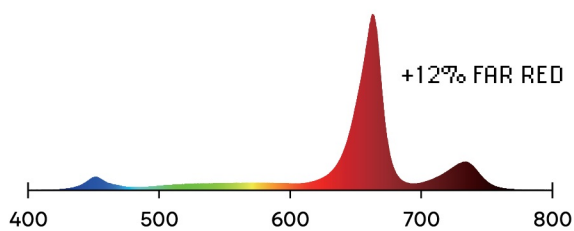

FAR RED ADDED BENEFITS:

- ➔ Deeper color throughout the plant.
- ➔ Great for candy-leaning genetics.

AMPS	DAISY-CHAIN MAX# CONNECTED	VOLTAGE
1.0	10	120
0.5	17	240
0.43	20	277




➔ 120W DIMMABLE LED
FIXTURE

➔ 46" L X 2.9" W X 3.3" H

➔ IP66 RATING

➔ 5YR WARRANTY



PPE ($\mu\text{MOL/J}$)	up to 2.9
PPF ($\mu\text{MOL/S}$)	up to 359
INPUT POWER	120 W
INPUT VOLTAGE	120V 240V 277V
INPUT CURRENT	1.0A 0.5A 0.43A
FREQUENCY	5-/60HZ
FIXTURE DIMENSIONS	45.6"L x 2.9"W x 3.3"H 11.57CM* 7.5CM* 8.5CM
WEIGHT	5.72LB / 2.6KG
THERMAL MANAGEMENT	PASSIVE
OPERATION TEMPERATURE	95°F/35°C MAX
LIGHT DISTRIBUTION	120°
DIMMING	40% - 100% OFF
LIFETIME	>50000 HRS


X3 PLANTS WIDE STANDARD SET-UP



POWER CHORD



FAQ

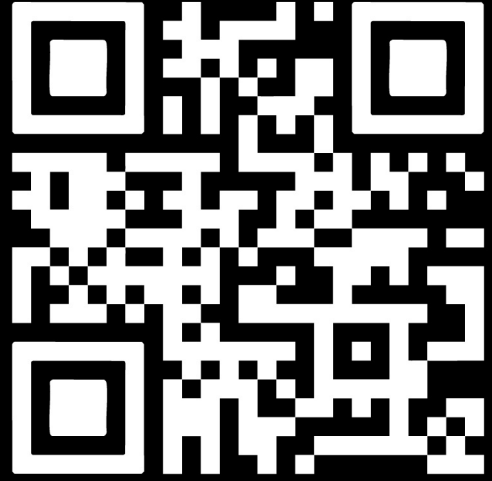

SALES AND INQUIRIES:

sales@favenlighting.com

916.235.3295

TECHNICAL SUPPORT:

support@favenlighting.com

916.234.6569

YOUTUBE + INSTAGRAM:

@FAVENLIGHTING

