

# FAVEN

## CHROMA

### UNDER CANOPY LIGHTING

#### → FINANCIALS

ROI in one Harvest,  
Reduce Labour Inputs.

#### → YIELD

Drive Revenue Targets:  
20-40% Yield Increase on  
Average.

#### → QUALITY

Sell Product Quickly:  
Reduce Low Value SKUS.

#### → UNIFORMITY

Top Dollar for your  
Product:  
Uniform in Color, Shape,  
and Density.



CHROMA BY FAVEN


XX

# TECHNICAL SPECIFICATIONS

AMPS	DAISY-CHAIN MAX # CONNECTED	VOLTAGE
1.0	9	120
0.5	17	240
0.43	20	277
0.25	35	480



- ➔ 120W + 15W FAR RED DIMMABLE LED FIXTURE
- ➔ INDEPENDENT FAR RED CHANNEL
- ➔ ADJUSTABLE SPECTRUM R4-R9 RED & WHITE
- ➔ IP66 RATING
- ➔ 5YR WARRANTY

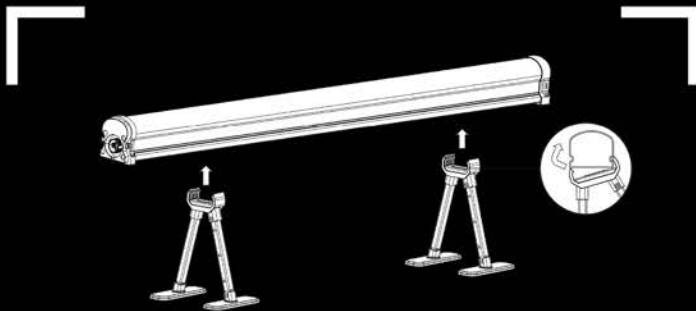

ADJUSTABLE STANDS  
8", 10", 12"




PPE (MOL/J)	up to 3.31
PPF (MOL/S)	up to 399(main) + 40(FR)
INPUT POWER	120 W + 15 W FR
INPUT VOLTAGE	120V 240V 277V 480V
INPUT CURRENT	1.0A 0.5A 0.43A 0.25A
FREQUENCY	50/60HZ
FIXTURE DIMENSIONS	45.6"L x 2.9"W x 3.3"H 115.7cm x 7.5cm x 8.5cm
WEIGHT	5.72LB / 2.6KG
THERMAL MANAGEMENT	PASSIVE
OPERATION TEMPERATURE	95 °F/35 °C MAX
LIGHT DISTRIBUTION	120°
DIMMING	40% - 100% OFF
LIFETIME	>50000 HRS

SEAMLESS CONNECTION




# ADJUSTABLE SPECTRUM


**R9**

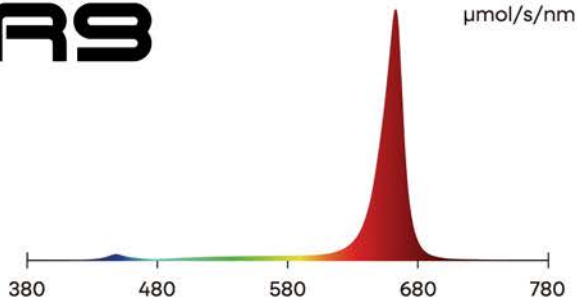


**R8**

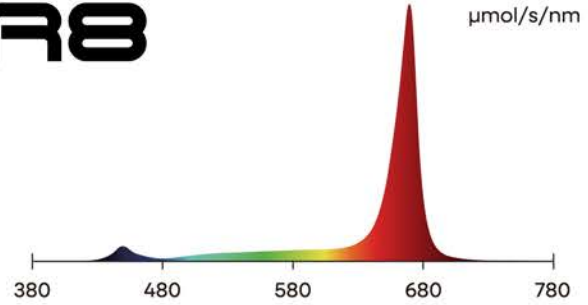


**R7**

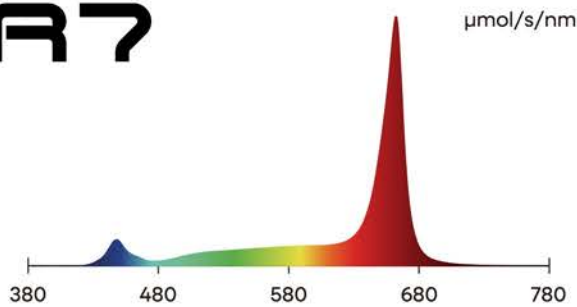


**R6**

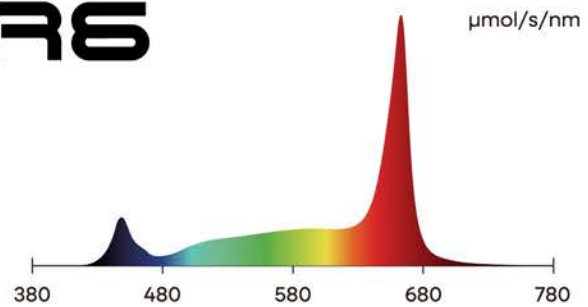

**R5**

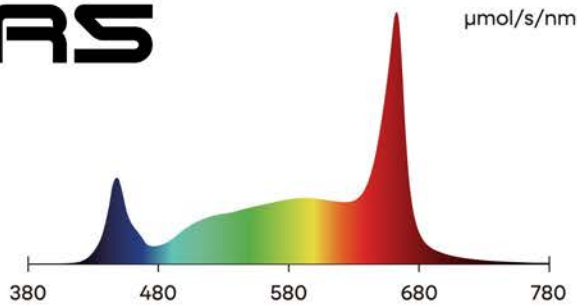


**R4**

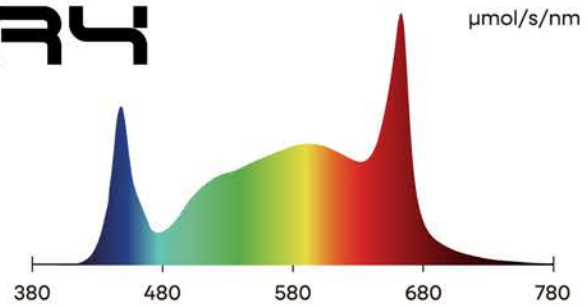

## INDEPENDENT FAR RED CHANNEL

Designed to run independently or  
in addition to any spectrum.

**FR**

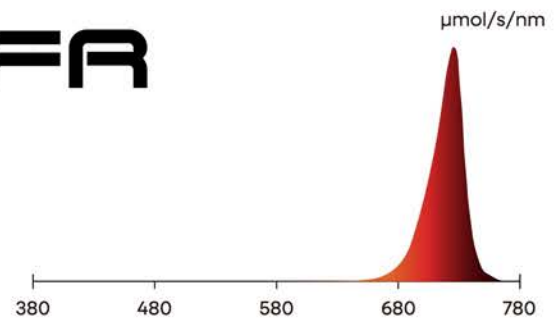

**SALES AND  
INQUIRIES:**

[sales@favenlighting.com](mailto:sales@favenlighting.com)

**TECHNICAL  
SUPPORT:**

[support@favenlighting.com](mailto:support@favenlighting.com)

**YOUTUBE +  
INSTAGRAM:**

[@favenlighting](https://www.youtube.com/favenlighting)



[info@favenlighting.com](mailto:info@favenlighting.com)



[favenlighting.com](https://www.favenlighting.com)