


FAVEN

CHROMA

UNDER
CANOPY
LIGHTING

- ➔ 120W + 15W
FAR RED LED
UNDER CANOPY
LIGHT
- ➔ INDEPENDENT
FAR RED CHANNEL
- ➔ ADJUSTABLE
SPECTRUM
R4-R9 RED &
WHITE

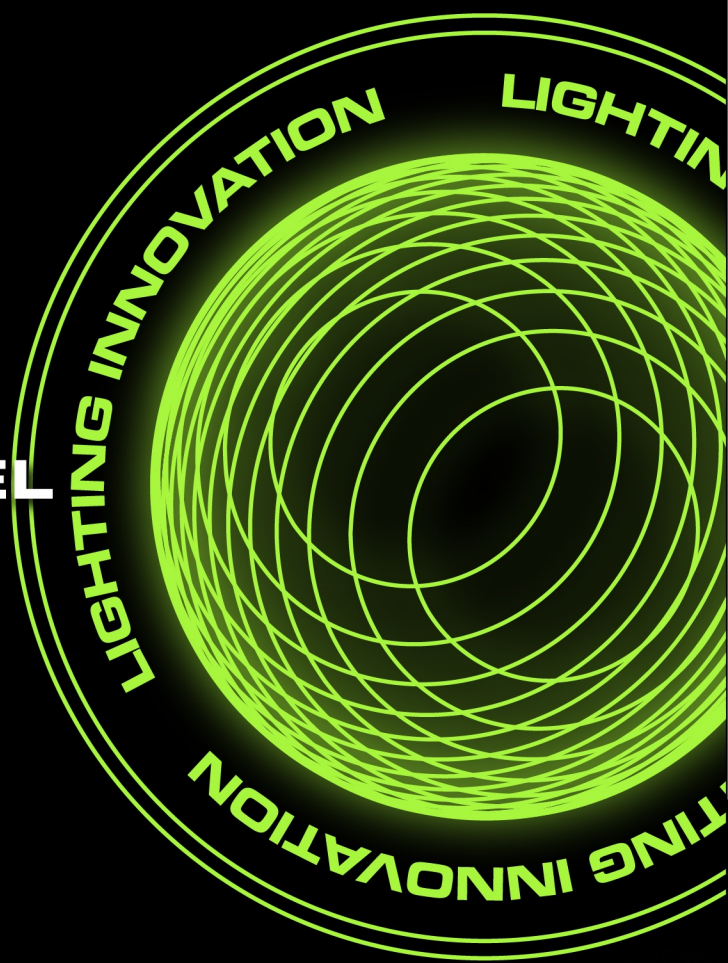

CHROMA BY FAVEN

XX

TECHNICAL SPECIFICATIONS


AMPS	DAISY-CHAIN MAX # CONNECTED	VOLTAGE
1.0	10	120
0.5	17	240
0.43	20	277
0.25	35	480



- ➔ 120W + 15W FAR RED DIMMABLE LED FIXTURE
- ➔ INDEPENDENT FAR RED CHANNEL
- ➔ ADJUSTABLE SPECTRUM R4-R9 RED & WHITE
- ➔ IP66 RATING
- ➔ 5YR WARRANTY




PPE (MOL/J)	up to 3.1
PPF (MOL/S)	up to 380
INPUT POWER	120 W
INPUT CURRENT	1.0A 0.5A 0.43A 0.25A
FREQUENCY	5-/60HZ
FIXTURE DIMENSIONS	45.6"L x 2.9"W x 3.3"H 11.57CM* 7.5CM* 8.5CM
WEIGHT	5.72LB / 2.6KG
THERMAL MANAGEMENT	PASSIVE
OPERATION TEMPERATURE	95°F/35°C MAX
LIGHT DISTRIBUTION	120°
DIMMING	40% - 100% OFF
LIFETIME	>50000 HRS

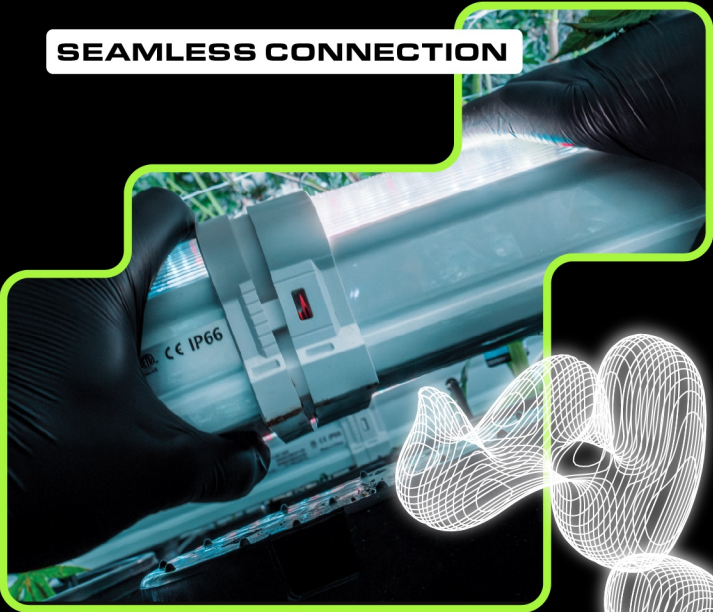


ADJUSTABLE SPECTRUM


R9

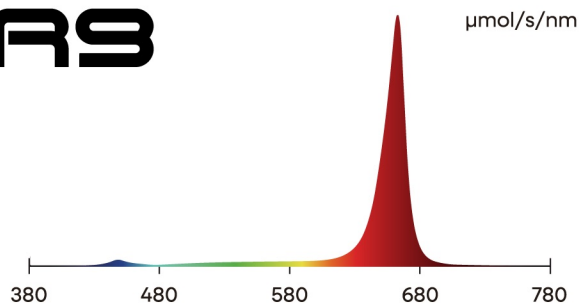


R8

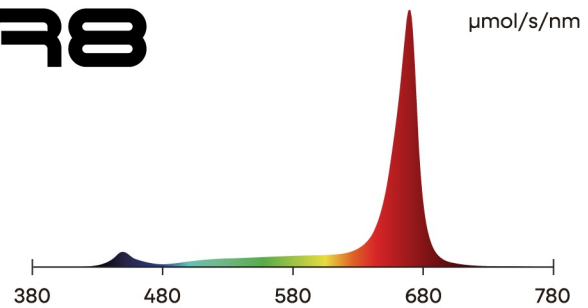


R7

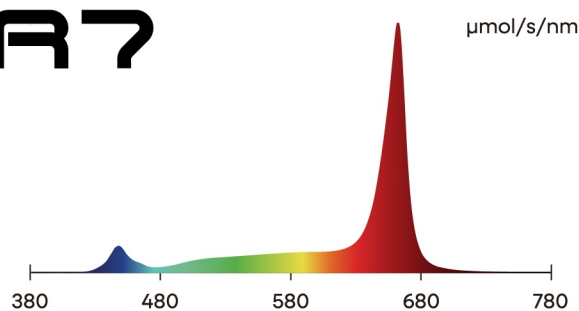


R6

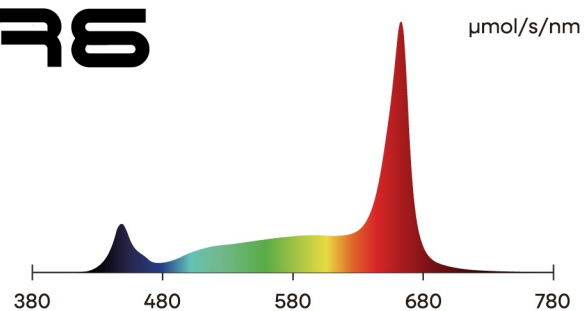

R5

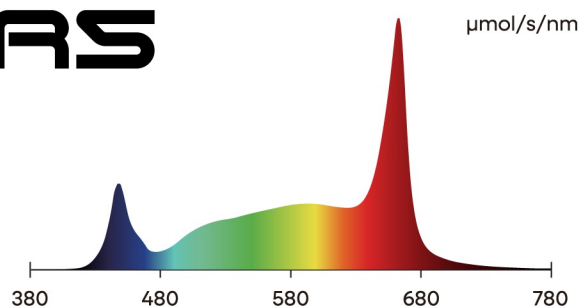


R4

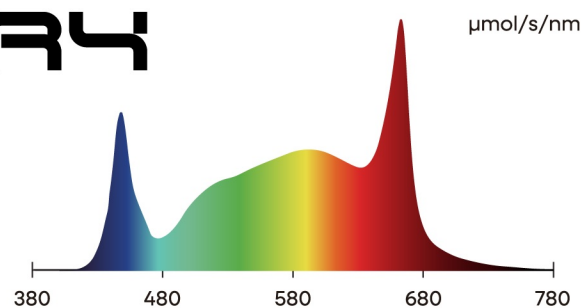

INDEPENDENT **FAR RED** CHANNEL

Designed to run independently or
in addition to any spectrum.

FR

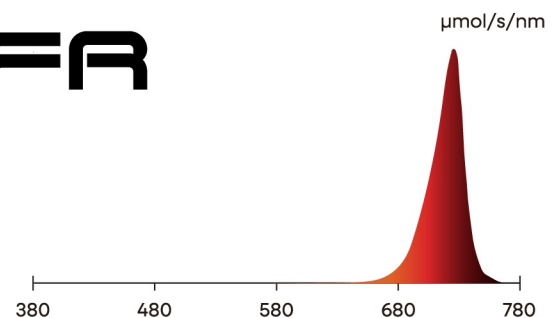

SALES AND INQUIRIES:

sales@favenlighting.com

TECHNICAL SUPPORT:

support@favenlighting.com

YOUTUBE + INSTAGRAM:

[@favenlighting](#)



info@favenlighting.com



favenlighting.com