


FLEXSTAR

UNDER CANOPY LIGHT


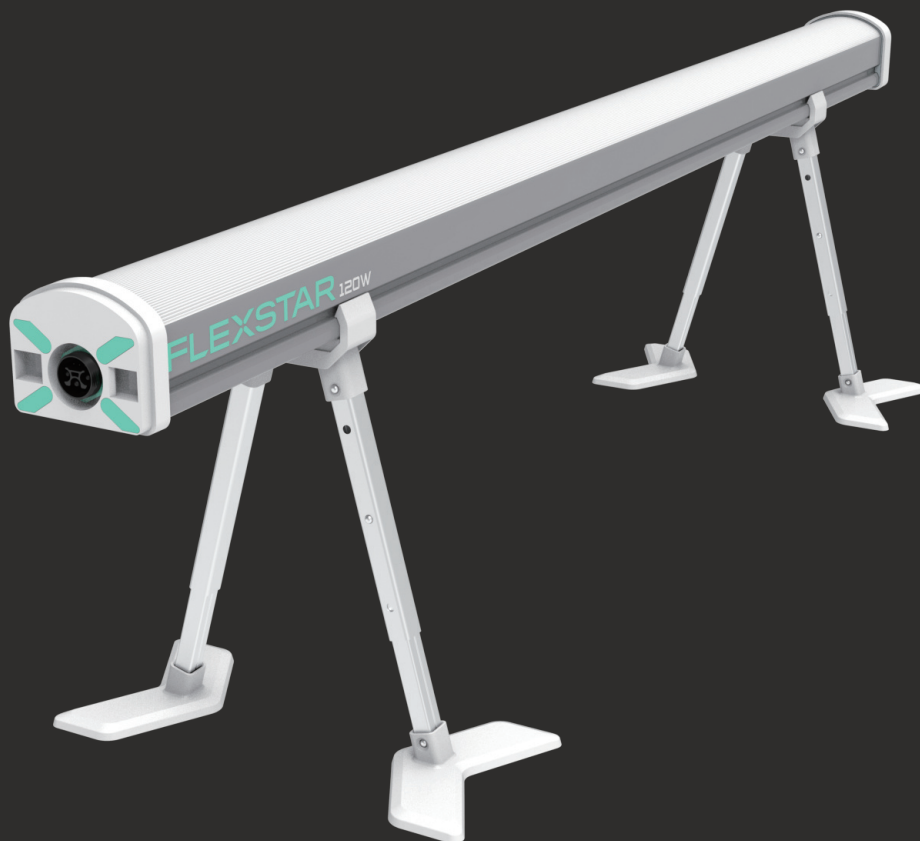


SPECIFICATIONS



Model	PPF	Efficacy	Input Voltage	Input Power	Fixture Dimensions	Weight
UNDER CANOPY 120W R5W	340 μ mol/s	2.8 μ mol/J	120V-277V	120W	45.6"L x 2.9"W x 3.3"H 115.7cm*7.5cm*8.5cm	5.73lb / 2.6kg
UNDER CANOPY 120W R8W	360 μ mol/s	3.0 μ mol/J	120V-277V	120W	45.6"L x 2.9"W x 3.3"H 115.7cm*7.5cm*8.5cm	5.73lb / 2.6kg

Dimming Voltage	0-10V	Light Distribution	120°
Dimming Range	40%-100%/OFF	Cooling	Passive
Daisy-Chain (Control)	Up to 17 lights	Lifetime (Q90)	> 50,000 hrs
Mounting Height	Under/ Above Canopy	IP Rating	IP66
Operation Temp.	95°F/ 35°C Max.	Certifications	ETL/DLC/CE

SPECTRAL OPTIONS

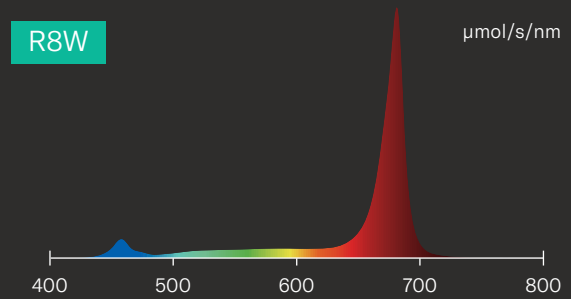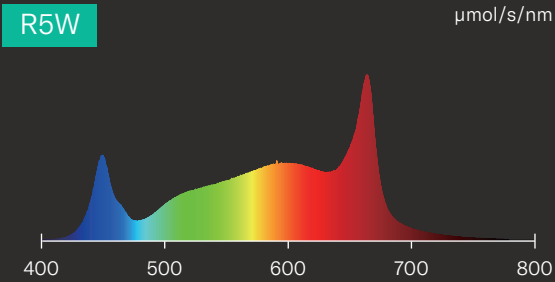

PRODUCTS

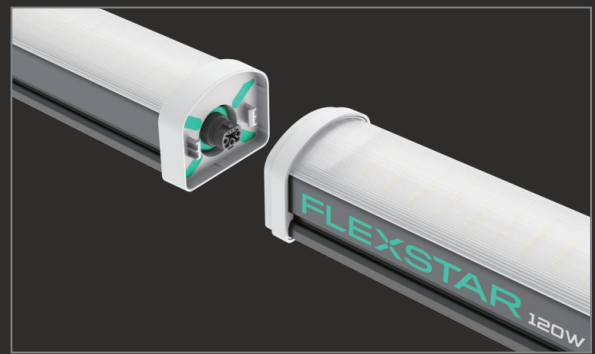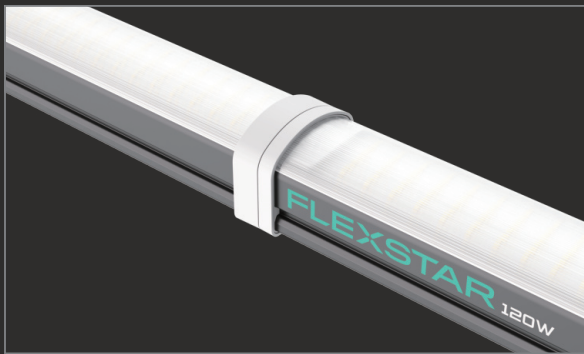

FEATURES

VERSATILE

Under canopy lighting for higher yield, compatible for downward lighting setup.

EFFICIENT

Scatter light output for better uniformity and penetration, PPE up to 3.0 umol/J

DURABLE

IP66 water proof and dust proof

CONVENIENT

Seamless end to end quick connection

sales@flex-star.com
www.flex-star.com

